FL-OFFICE.FR
AMÉNAGEMENT DE BUREAU

BUZZISKIN

Fiche technique

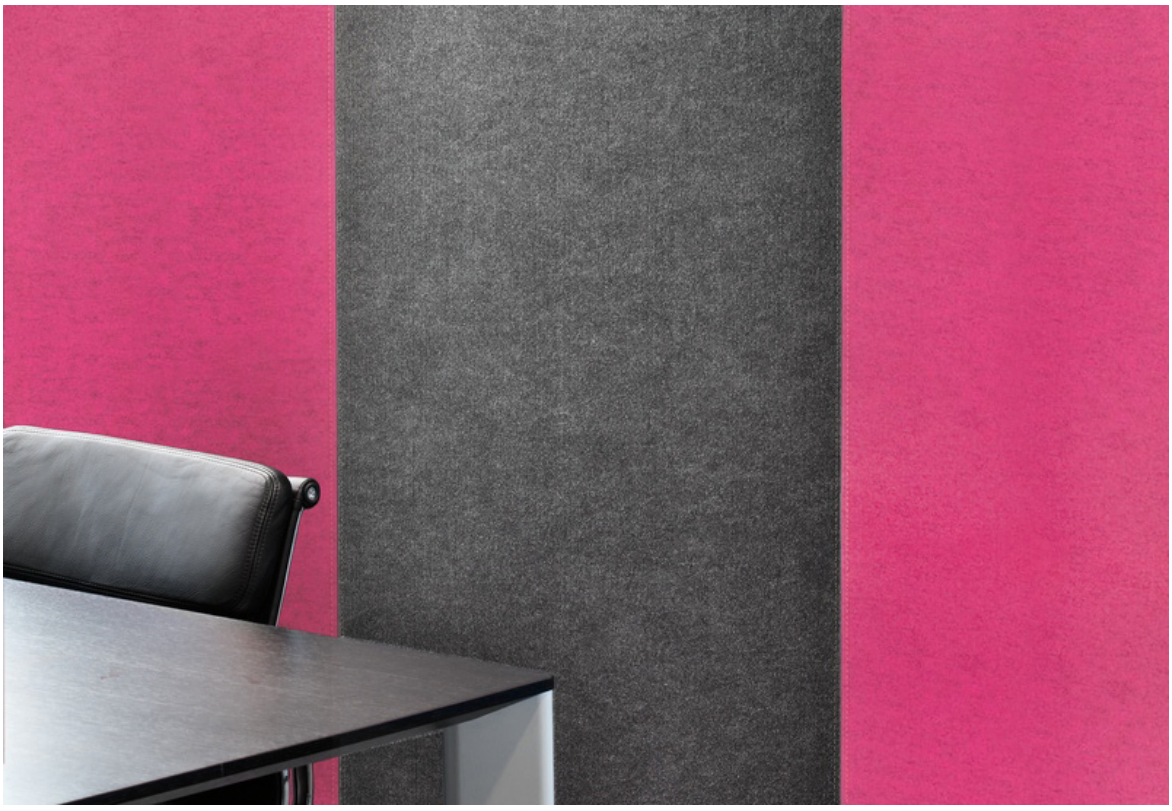

contact@bm-bureau.fr -- 01 84 73 00 37 - - 442 rue Fourny 78530 Buc
www.fl-office.fr

Felt with self-adhesive backing
What would your perfect wall be like? Cuddly and sound absorbing? A surface you can pin photos to? Available in striking colors and easy to install? Environmentally friendly? Now you can have all these things at once! BuzziSkin has everything it takes to improve any interior at home or at work. It is available on handy, self-adhesive rolls.

Design by Sas Adriaenssens

General

BuzziSkin

Front Layer: BuzziFelt
Back Layer: Self-adhesive BuzziSkin

Roll: 10 m x 0,98 m | 393.70" x 38.58
Thickness: 6 mm + 0,1 mm self-adhesive | 0.24" + 0.04" self-adhesive

1000g/sqm | 29.49oz/sqyd

We do not recommend installing BuzziSkin on the ceiling or the floor.
BuzziSkin is not suitable as seating surface because it will become fluffy.
Treat the surface with water-based primer before applying BuzziSkin for optimal adhesion results.
BuzziSkin can not be applied on vinyl, melamine or any other plasticized surface.
No claims concerning deviation in color, size, and thickness can be accepted.
Because of the nature of the product this can variate. The risk is more likely in different batches.

Certifications

CE

Acoustics

Absorption

Content

Configurations	3
Fabrics	4
Dimensions	5
Acoustics	6

Configuration

BuzziSkin

Front Layer: BuzziFelt
Back Layer: Self-adhesive BuzziSkin

Roll: L: 10 m W 0,98 m | L 393.70” W 38.58”
Thickness: 6 mm + 0,1 mm self-adhesive
0.24” + 0.04” self-adhesive

1000g/sqm | 29.49oz/sqyd

We do not recommend installing BuzziSkin on the ceiling or the floor.
BuzziSkin is not suitable as seating surface because it will become fluffy.
Treat the surface with water-based primer before applying BuzziSkin for optimal adhesion results.
BuzziSkin can not be applied on vinyl, melamine or any other plasticized surface.
No claims concerning deviation in color, size, and thickness can be accepted.
Because of the nature of the product this can variate. The risk is more likely in different batches.

Fabrics

Skin

Composition 100% Recycled P.E.T. Felt, selfadhesive backing
Weight 1.000 g/m2 | 29.49 oz/yd2
Abrasion resistance >7.000 Martindale
Flammability EU: EN 13501.1:2013 Class C-s2,d0
USA: ASTM E84 Class A certified
Fastness to light USA 5



SK-Jeans 75

SK-StoneGrey 67



SK-LightBlue 60



SK-Curry 61

SK-OffWhite 63

SK-Mokka 74

SK-EcoBrown 58



SK-Lime 64

SK-Pink 65

SK-Orange 66

SK-Red 59



SK-Anthracite 68

Dimensions

Length: 10m | 393.70″
Thickness: 6 mm | 0.24″

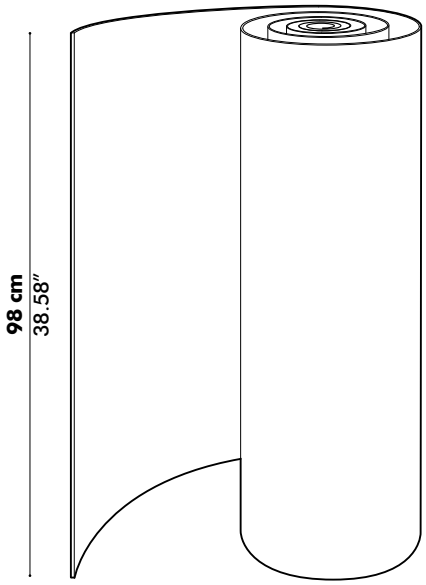

Acoustics

BuzziSkin

Absorption coefficient

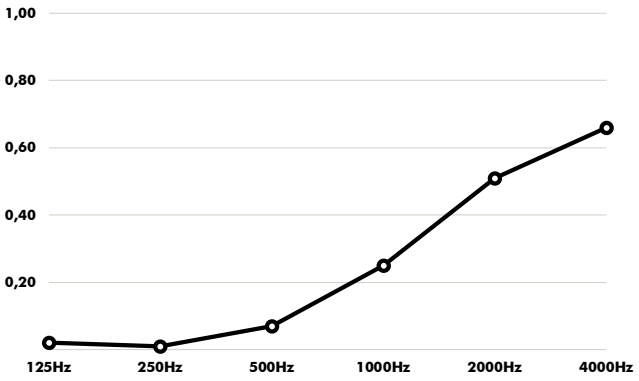

Hz	α^s
125	0.02
250	0.01
500	0.07
1000	0.25
2000	0.51
4000	0.66

Absorption Values

α_w (ISO 11654)	**0.15**
NRC (ASTM - C423)	**0.20**
SAA (ASTM-C423)	**0.21**

Glossary

All calculations are based on accredited lab measurements, official document available on Buzzi.Space

Definitions

α	Weighted absorption coefficient	(ISO 11654)
NRC	Noise reduction coefficient	(ASTM - C423)
SAA	Sound absorption average	(ASTM - C423)

Classification of sound absorbers NEN-EN-ISO 11654

A	0.90 | 0.95 | 1.0
B	0.80 | 0.85
C	0.60 | 0.65 | 0.70 | 0.75
D	0.03 | 0.55
E	0.15 | 0.25